





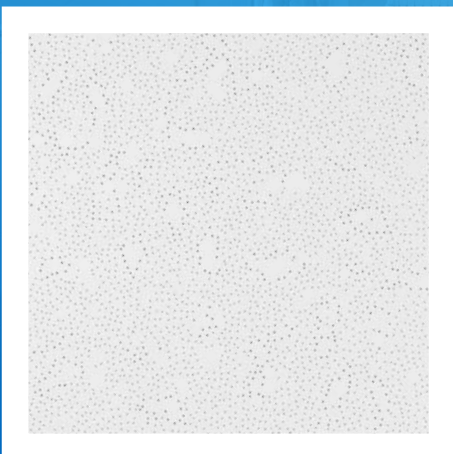




AMF ECOMIN Filigran

- ECOMIN Filigran is a ceiling panel with a perforated surface and a value-for-money solution for areas requiring good noise absorption
- High light reflectance (86%)
- Ideal for retail environments



Edge details Additional edge details on request	Board 														
Thickness (mm)	12														
Dimensions (mm) Additional sizes on request	600 x 600 1200 x 600														
System	Exposed demountable - System C Exposed - Bandraster, demountable - System I.3 Exposed - Corridor, demountable - System F.3														
Weight	2.5 - 3.1 kg / m ²														
Colour	White														
Sound absorption	EN ISO 354 $\alpha_w = 0.55$ as per EN ISO 11654 - Class D <table border="1" data-bbox="459 943 1453 1014"> <thead> <tr> <th>Frequency f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p Board</td> <td>0.45</td> <td>0.45</td> <td>0.45</td> <td>0.60</td> <td>0.60</td> <td>0.50</td> </tr> </tbody> </table> NRC = 0.50 as per ASTM C 423	Frequency f (Hz)	125	250	500	1000	2000	4000	α_p Board	0.45	0.45	0.45	0.60	0.60	0.50
Frequency f (Hz)	125	250	500	1000	2000	4000									
α_p Board	0.45	0.45	0.45	0.60	0.60	0.50									
Fire reaction	Euroclass A2-s1, d0 as per EN 13501-1 RUS KM1 (G1, V1, D1, T1) as per FZ 123														
Light reflectance	86%														
Thermal conductivity	$\lambda = 0.060 \text{ W/m K}$ as per EN 12667														
Humidity resistance	70% RH														
Indoor air quality	  A+ E1														
Cleanability	 														
Sustainability	 EN ISO 14021 35-49%														

Products may vary from country to country.
 Please contact your local sales representative.
 For further information and legal notice, please visit our website.